

# Argus

## Automatic on-loom inspection for Jacquard fabrics



**ARGUS is the first system ever capable of inspecting uni-color jacquard woven fabrics on the weaving machine.**


The **ARGUS** scanner consists of an array of fixed cameras and a LED illumination bar in a slim aluminum housing and can be mounted in the loom or on the batching motion.

Intelligent image recognition software algorithms detect warp and filling defects, stains, floats and many other weaving defects and **ARGUS** will stop the loom in case of severe defects and risks for off-quality. An additional software module allows monitoring of tracer distances in OPW (One Piece Woven) airbag fabrics.


Connected to the BMSvision **QUALIMASTER** system, all defect information, pick and time stamped, is sent and stored in a fabric quality database, allowing generation of piece maps and various types of quality analysis reports.

**ARGUS** is the perfect quality monitoring tool for weavers of high end jacquard fabrics such as OPW airbag and mattress ticking.


## Typical defects

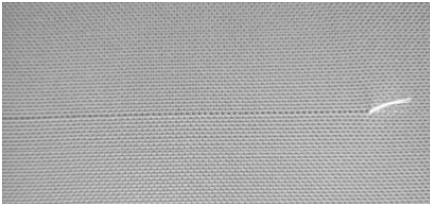


Pick defect

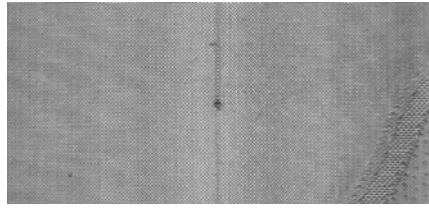


Warp defect

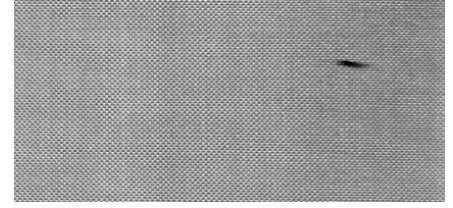


Stain

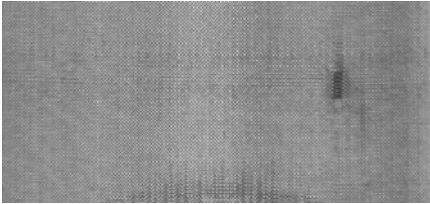

Local

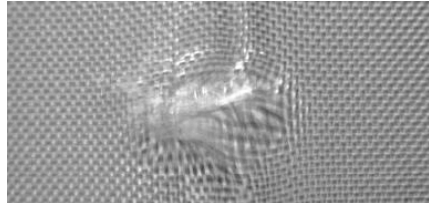

Mechanical distortion

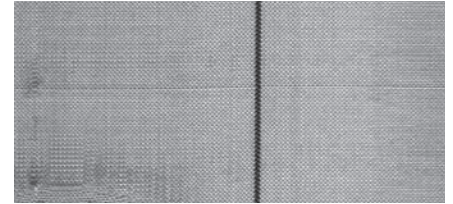

Starting mark, pick defect

## Tracer report

VERTICAL TRACER REPORT																		
Airbag Row		Warn Level		Confirm		Actual		Tot: 1 mm		Row: Trn: 0								
f HT	1	2	3	4	5	6	7	8	9	10	11	12	13					
6	9.7	34.8	9.8	10	35.2	9.9	9.9	35.2	10	10.1	35							
7	9.7	34.9	-0.1	9.8	0.1	9.9	-0.1	35.3	9.9	9.9	35.2	10	10.1	35				
8	9.7	34.9	0.1	9.9	-0.1	9.9	0.2	35.3	-0.1	9.9	35.2	-0.1	10	0.1	10.1	35	-0.1	
9	9.7	34.9		9.8		10		35.3		9.9		9.9		10		10.2		35
10	9.7	34.9	-0.1	9.8	0.1	10		35.3		9.9		9.9		10	-0.1	10.1		35

HORIZONTAL TRACER REPORT																								
Airbag Row		Warn Level		Confirm		Actual		Tot: 1 mm		Row: Trn: 0														
HT	1	2	3	4	5	6	7	8	9	10	11	12	13											
11->12	37.9	0.7	38	0.3	37.8	1	38	0.2	37.9	0.7	38	0.7	37.9	0.6	37.9	0.7	37.8	1	37.9	0.7	37.8	1	37.9	0.9
12->13	38.3	-0.5	38.3	0	38.3	-0.4	38.5	-0.4	38.4	-0.6	38.3	-0.8	38.3	-0.1	38.4	-0.5	38.3	-0.6	38.3	-0.8	38.3	-0.5	38.1	-0.1
13->14	38.3	0.1	38.1	-0.1	38.2	0.1	38.1	0.4	38.3	0.1	38.4	0.2	38.2	-0.3	38.2	0.2	38.4	0.1	38.4	0.2	38.3	0	38.3	-0.7
14->15	38	0.4	38.2	0.1	38.1	0.2	38	0.1	38	0.5	37.9	0.5	38.3	0.2	38.1	0.2	38.1	0	37.8	0.5	38.1	0.2	38.4	0.3

### Benefits and advantages

- Real time detection allowing to stop the loom and prevent production of defective fabric
- Independent of human perception
- Automatic fabric grading, based on customer defined rules
- Easy to install and operate
- User friendly HMI for display of defect images and quality reports
- No maintenance required
- Low power consumption

### Argus specifications

- Maximum available width: 3000 mm
- Illumination: blue LEDs
- Camera resolution: 10 pixels/mm
- Loom interface: VDI, Ethernet
- Shopfloor network: Ethernet
- Maximum power consumption: 45 W
- Option for front and back inspection

### Touch panel specifications

- 15.6" TFT touch panel, 1366 x 768 pixels (16:9)
- VESA 100 x 100 mm compliant mounting
- Dimensions: 420 x 269 x 59 mm (W x H x D)
- Power: 100 to 240 Vac, 50 W



BMSvision

sales@bmsvision.com  
www.bmsvision.com

Belgium: +32 56 262 611  
United Kingdom: +44 1254 662 244

United States: +1 704 392 9371  
China: +86 512 8889 8800